



INSTALLATION CHART FOR TYPE "AXCF"

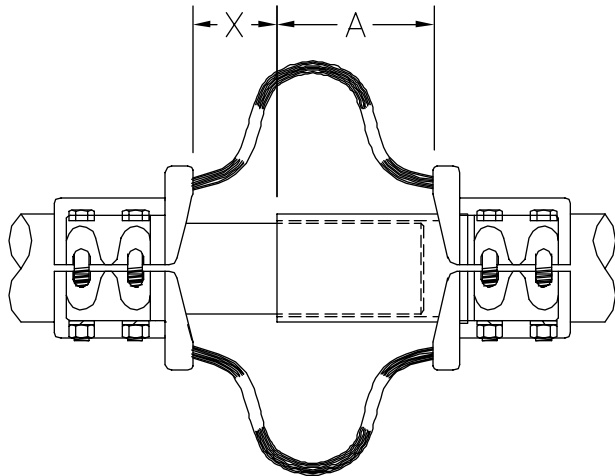

Type I
(fixed sleeve)

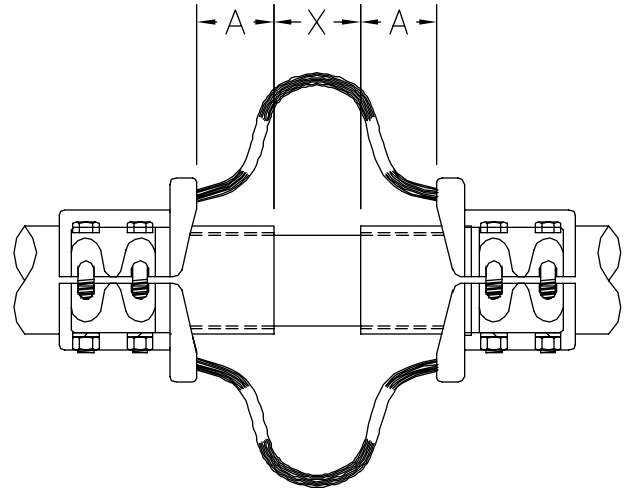

Type II
(floating sleeve)

Pipe Size (SPS)	Type	Max Length between fixed supports (ft.)	A (in.)	X (in.) at specified installation bus temperature													
				0°F	10°F	20°F	30°F	40°F	50°F	60°F	70°F	80°F	90°F	100°F	110°F	120°F	130°F
1	II	120	2	3 5/8	3 1/2	3 1/4	3 1/8	2 7/8	2 3/4	2 1/2	2 3/8	2 1/8	2	1 3/4	1 5/8	1 3/8	1 1/4
1 1/4	I	130	6	3 7/8	3 5/8	3 1/2	3 1/4	3	2 7/8	2 5/8	2 1/2	2 1/4	2	1 7/8	1 5/8	1 1/2	1 1/4
1 1/2	I	160	6 7/8	4 1/2	4 1/4	4	3 7/8	3 5/8	3 3/8	3 1/8	2 7/8	2 5/8	2 3/8	2 1/8	1 7/8	1 5/8	1 1/2
2	I	230	6	6 1/2	6 1/4	5 7/8	5 1/2	5 1/8	4 3/4	4 1/2	4 1/8	3 3/4	3 3/8	3	2 3/4	2 3/8	2
2 1/2	I	210	6	6 1/8	5 3/4	5 1/2	5 1/8	4 3/4	4 1/2	4 1/8	3 7/8	3 1/2	3 1/8	2 7/8	2 1/2	2 1/4	1 7/8
3	II	220	3 3/4	6 3/8	6	5 5/8	5 3/8	5	4 5/8	4 1/4	4	3 5/8	3 1/4	3	2 5/8	2 1/4	2
3 1/2	II	200	3 3/4	5 7/8	5 5/8	5 1/4	5	4 5/8	4 3/8	4	3 3/4	3 3/8	3 1/8	2 3/4	2 1/2	2 1/8	1 7/8
4	I	200	6 1/2	5 7/8	5 5/8	5 1/4	5	4 5/8	4 3/8	4	3 3/4	3 3/8	3 1/8	2 3/4	2 1/2	2 1/8	1 7/8
5	II	190	3 3/4	5 3/8	5 1/8	4 7/8	4 5/8	4 1/4	4	3 3/4	3 3/8	3 1/8	2 7/8	2 1/2	2 1/4	2	1 3/4
6	II	160	3 3/4	4 1/2	4 1/4	4	3 7/8	3 5/8	3 3/8	3 1/8	2 7/8	2 5/8	2 3/8	2 1/8	1 7/8	1 5/8	1 1/2

When installed at the listed dimensions, the connector will accommodate a temperature range between -20°F and 180°F for a distance between fixed supports up to and including the maximum listed.



DWS 2/13/02

AA-2671

No. By Date Revision